


6XRP 60

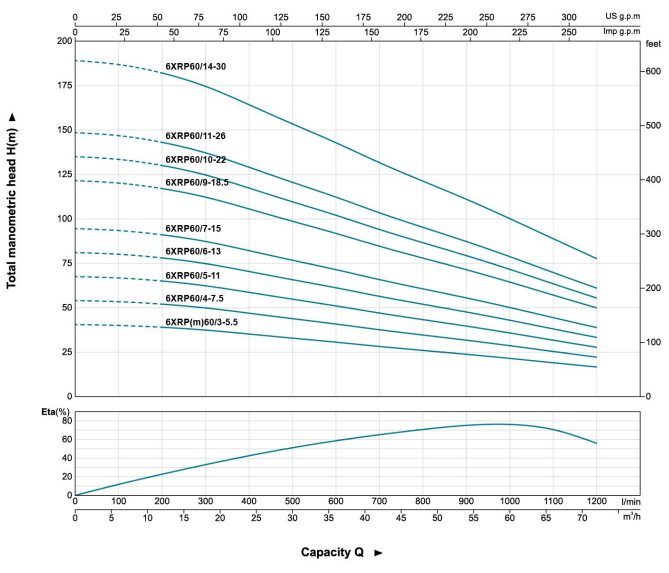

Technical Data

MODEL	P ₂		DELIVERY																
	1~	3~	n ≈ 2850 1/min																
220 - 240V	380 - 415V	kW	HP	Q	0	6	12	18	24	30	36	42	48	54	60	66	72		
6XRPm60/3-5.5	6XRP60/3-5.5	5.5	7.5	H(m)	0	41	40	39	37	35	33	31	28	26	24	22	19	17	
-	6XRP60/4-7.5	7.5	10		0	54	53	52	50	47	44	41	38	34	32	29	26	22	22
-	6XRP60/5-11	11	15		0	68	67	65	62	59	55	51	47	43	40	36	32	28	28
-	6XRP60/6-13	13	17.5		0	81	80	78	75	70	66	61	57	51	48	43	39	33	33
-	6XRP60/7-15	15	20		0	95	93	91	87	82	76	71	66	60	55	50	45	39	39
-	6XRP60/9-18.5	18.5	25		0	122	120	117	112	105	98	92	85	77	71	65	58	50	50
-	6XRP60/10-22	22	30		0	135	134	130	125	117	109	102	94	86	79	72	64	56	56
-	6XRP60/11-26	26	35		0	149	147	143	138	129	120	112	104	94	87	79	71	61	61
-	6XRP60/14-30	30	40		0	189	187	182	175	164	153	143	132	120	111	101	90	78	78


4DWP

- Applications**
- For water supply from wells or reservoirs
 - For domestic use for civil and industrial applications
 - For garden use and irrigation


- Operating conditions**
- Maximum fluid temperature up to +40°C
 - Maximum sand content: 0.15%
 - Maximum immersion: 50 m
 - Minimum well diameter: 4"

- Motor and Pump**
- Rewindable motor
 - **Single-Phase:** 220 - 240V/50Hz
 - **Three-Phase:** 380 - 415V/50Hz
 - Equip with start control box or digital auto - control box
 - Curve tolerance according to ISO 2548

4 DW P(m) 750 S



Components	Material
Delivery casing	AISI 201 SS
Suction lantern	AISI 201 SS
Diffuser	AISI 201 SS
Impeller	Cast-Cu ASTM680
Shaft	AISI 304 SS
Motor external casing	AISI 304 SS
Top choke	① Cast-Cu ASTM680 ② AISI 420 SS
Bottom support	AISI 304 SS
Mechanical seal	Carbon/graphite
Shaft	AISI 304ss - C1045
Bearing	NSK
Seal lubricant oil	Oil for food machinery and pharmaceutical use.



Technical Data

Model	P ₂		Delivery													
	1~	3~	n ≈ 2850 1/min													
220V/240V	380V/415V	KW	HP	Q	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7		
4DWPm750S	4DWP750S	0.75	1	H(m)	0	58	52	46	40	34	28	22	16	10	5	
4DWPm1100S	4DWP1100S	1.1	1.5		0	100	89	79	69	59	48	38	28	17	7	
4DWPm1500S	4DWP1500S	1.5	2		0	110	99	88	78	67	56	45	34	23	12	