


| | |
|---------------------|-------------|
| Receiver | From |
| Company name | |
| Respons. Department | |
| Person in charge | |
| Phone number | |
| Fax no | |
| E-mail address | |

| Operating area | Flow | Head | Impeller type | Peripheral impeller | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|--|-------------------|-----------------------|------------------------------|----------------|-------|-------------|----------------|-------|-------|-------|-------|------|------|------|-------------|--------|-------------|---------|------|-------------|-----------|----|-------|-------------------|-------------------|-------------------|---|---|----|----|----|--|--|--|---|------|------|------|------|--|-------|-------|--|--|--|--|--|
| Operating data specification | 0 m ³ /h | 0 m | Impeller construction | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pump data | m ³ /h | m | Sense of rotation | Clockwise from the drive end | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | Outlet width | G1" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="3">Flow</th> <th colspan="2">Head</th> <th colspan="3">Shaft power P2</th> <th>Speed</th> <td>1/min</td> <td>2850</td> </tr> <tr> <th>Min.</th> <th>Max.</th> <th>η Max.</th> <th>H(Q=0)</th> <th>η Max.</th> <th>P2(Q=0)</th> <th>Max.</th> <th>η Max.</th> <th>Frequency</th> <td>Hz</td> <td>50 Hz</td> </tr> <tr> <td>m³/h</td> <td>m³/h</td> <td>m³/h</td> <td>m</td> <td>m</td> <td>kW</td> <td>kW</td> <td>kW</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1</td> <td>2.99</td> <td>2.09</td> <td>79.8</td> <td>28.1</td> <td></td> <td>0.884</td> <td>0.578</td> <td></td> <td></td> <td></td> </tr> </table> | | Flow | | | Head | | Shaft power P2 | | | Speed | 1/min | 2850 | Min. | Max. | η Max. | H(Q=0) | η Max. | P2(Q=0) | Max. | η Max. | Frequency | Hz | 50 Hz | m ³ /h | m ³ /h | m ³ /h | m | m | kW | kW | kW | | | | 1 | 2.99 | 2.09 | 79.8 | 28.1 | | 0.884 | 0.578 | | | | | |
| Flow | | | Head | | Shaft power P2 | | | Speed | 1/min | 2850 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Min. | Max. | η Max. | H(Q=0) | η Max. | P2(Q=0) | Max. | η Max. | Frequency | Hz | 50 Hz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| m ³ /h | m ³ /h | m ³ /h | m | m | kW | kW | kW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2.99 | 2.09 | 79.8 | 28.1 | | 0.884 | 0.578 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Performance data based to: Water, pure [100%]; 20°C; 0.998kg/dm³; 1mm²/s

UNI EN ISO 9906:2012 - Grade 3B

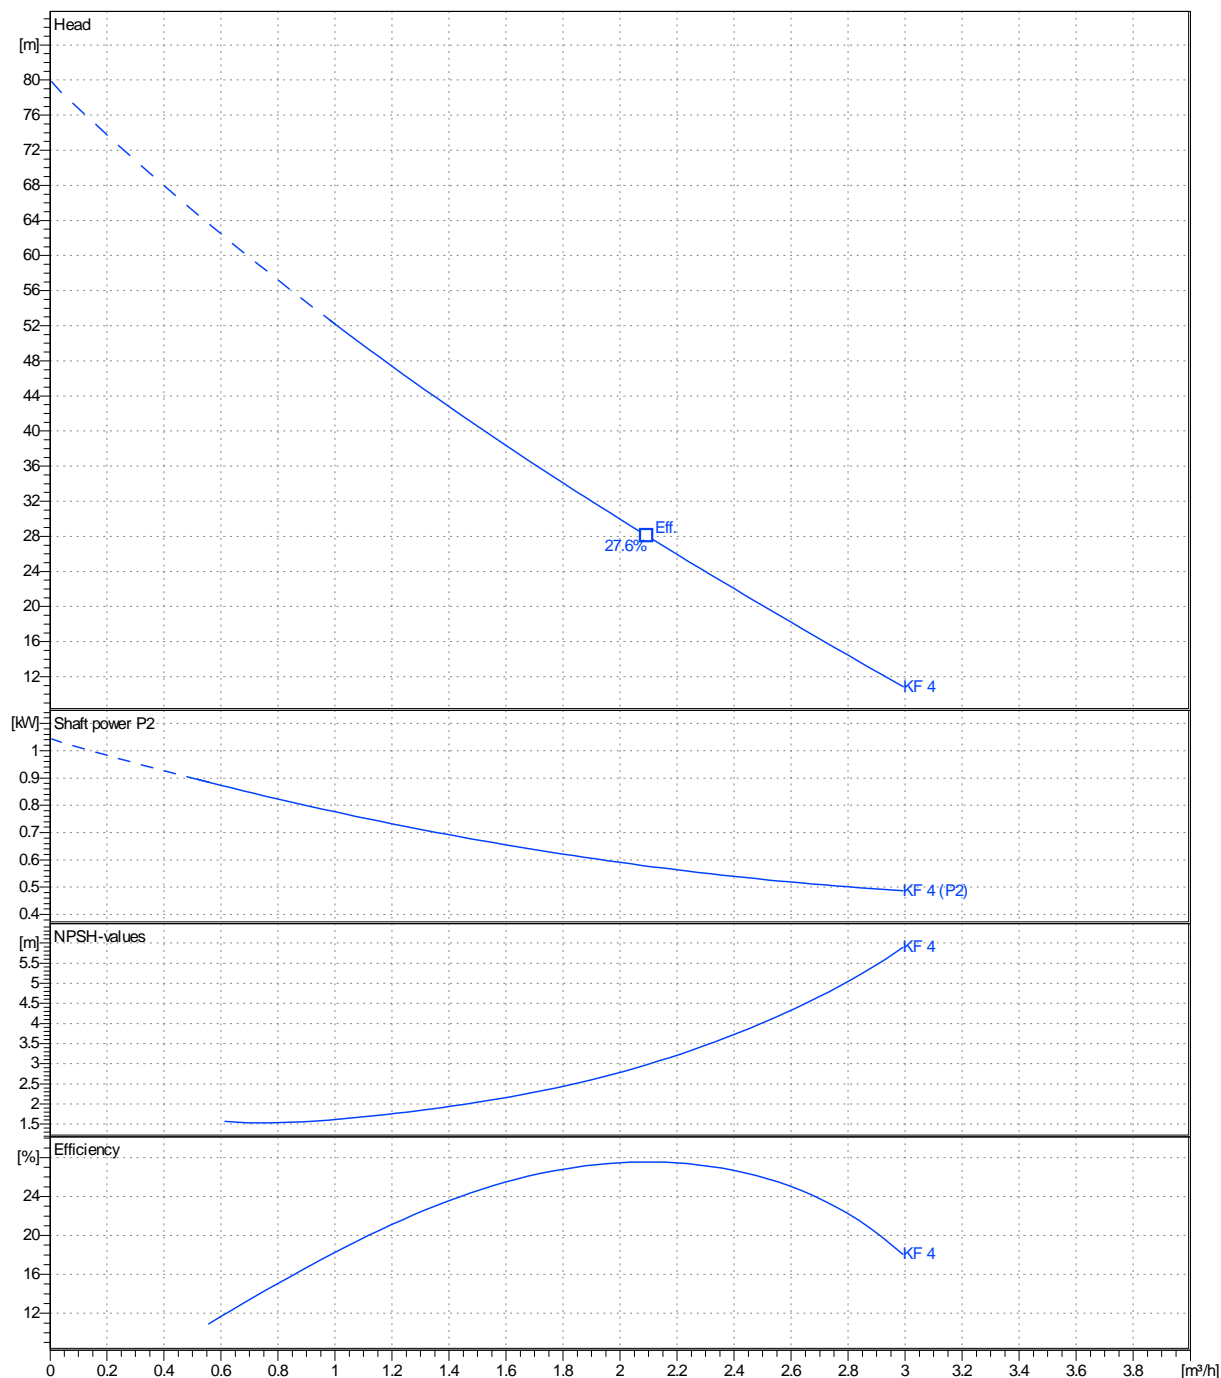

| | | | | |
|---------|------------|------------|------------|-------------|
| Project | Project ID | Created by | Created on | Last update |
| | | | 2020-09-24 | |